


TAT891 Industrial Intercom

Technical specifications

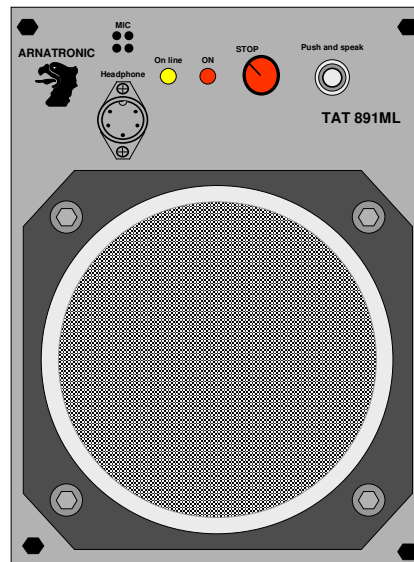

In order to improve your communications equipment, IFETURA-eu proposes a **very simple** and especially **easy to handle and compact** intercom to set up **comfortable and permanent conversations** between operators.

Of a **robust** design, and its **10W** power this intercom set is particularly efficient for use in **severe environments** (splashing water, dust, noisy environments, vibrations, electrical interference...). It is useful into control rooms, cockpits, specials machines, buildings lock chambers...

Technical characteristics

Power.....	:	10W max. (under 8Ω)
Power supply.....	:	18 to 32V _{DC}
Consumption.....	:	1.4A max.
Distance.....	:	40km max. (point to point)
Line impedance	:	< 50Ω
Transmission line.....	:	2 x 1mm ² min.
Weight.....	:	2kg
Dimension (L x H x P).....	:	136 x 170 x 70 mm
Enclosure.....	:	Built-in or Hermetic
Protection.....	:	IP 53 or IP66 (upon enclosure)
Operating temperature.....	:	-10°C à +60°C
Storage temperature.....	:	-30°C à + 70°C
Connections	:	6 wire cable
Relative humidity.....	:	90%